


ZSR220

Z-Wave Voice Controller



- ◆ Support ASR voice recognition, up to 26 languages
- ◆ Off-line voice control without internet connection
- ◆ Pre-defined 20 voice commands
- ◆ Standard Z-Wave protocols
- ◆ Support mesh network
- ◆ Work together with Z-Wave hub

Multi-room Architecture

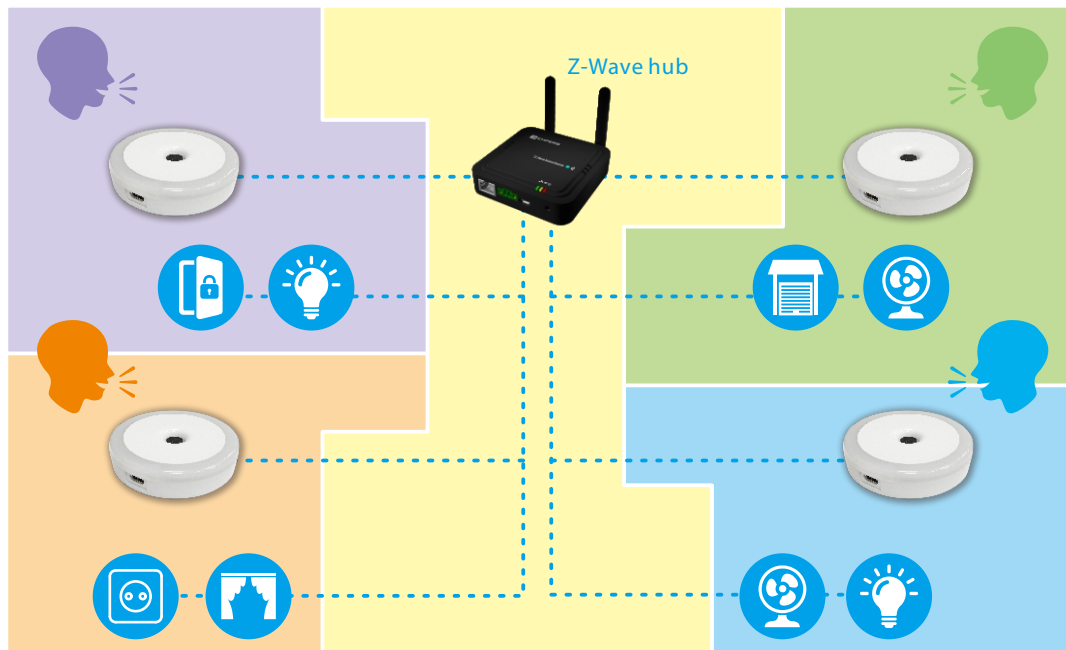

Specification

Voice recognized	ASR Module
Wireless	Z-Wave 908.42 MHz (US), 868.42 MHz(EU), 922.5 MHz (JP)
RGB LED	1. Blue light on: device unpaired 2. Blue light off: device paired 3. Red light on: wake up code correctly recognized 4. Red light off: voice commands correctly recognized
Interface	micro USB: power supply
Pairing button	On board button
Audio	Microphone: omnidirectional
Microphone range	2 meters
Model	English: ZSR220E, Mandarin: ZSR220C, Japanese: ZSR220J German: ZSR220G, Spanish: ZSR220S, French: ZSR220F
Power	micro USB 5VDC, 1A
Temperature	Operation: -20~70°C, storage: -20~70°C
Dimension	65(L) x 65(W) x 15(H) mm

Ordering Information

- . ZSR220E
- . ZSR220C
- . ZSR220J
- . ZSR220G
- . ZSR220S
- . ZSR220F